


PLAN VIEW

**FLEXAMAT INFORMATION**

Manufacturer: Motz Enterprises, Inc.  
 Product Name: Flexamat  
 Address: 3153 Madison Road  
 Cincinnati, Ohio 45209  
 Telephone: 513-772-MOTZ (6689)  
 Fax: 513-772-6690  
 Contact: Matt Motz  
 Matt@Flexamat.com  
 Website: [www.Flexamat.com](http://www.Flexamat.com)

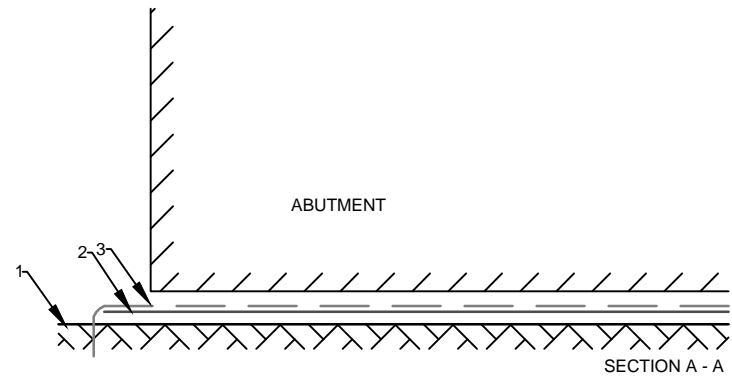

**CONSTRUCTION NOTES:**

1. THE SUBGRADE MUST BE STABLE, UNIFORMLY GRADED, FREE OF ROCKS, ROOTS, AND OTHER DEBRIS, WITH NO ABRUPT GRADE CHANGES, PRIOR TO INSTALLING THE FLEXAMAT.
2. SITE SPECIFIC SEED MIXES, INCLUDING NATIVE GRASSES, SHOULD BE INSTALLED ON THE PREPARED SUBGRADE PRIOR TO INSTALLING THE FLEXAMAT.
3. FLEXAMAT IS AVAILABLE IN WIDTHS OF 5.5', 8', 10', 12', AND 16'. WHENEVER POSSIBLE, USE MATS THAT WILL COVER THE FULL LENGTH AND WIDTH TO REDUCE SEAMS. WHERE SEAMS ARE NECESSARY, FOLLOW MANUFACTURER SEAM RECOMMENDATIONS.
4. THE OUTSIDE EDGES OF FLEXAMAT SHALL BE ANCHORED IN A 24" ANCHOR TRENCH, FILLED WITH COMPACTED SOILS.

**FLEXAMAT™ BRIDGE ABUTMENT  
 PLAN AND PROFILE DETAIL  
 NTS**