


OPTIONAL STONE INFILL, USE 10 OZ. NON-WOVEN GEOTEXTILE UNDERLAYMENT

FOR CLAY OR GRANULAR SOILS, A GEOTEXTILE SEPARATION FILTER FABRIC BETWEEN SUBGRADE AND BASE IS RECOMMENDED

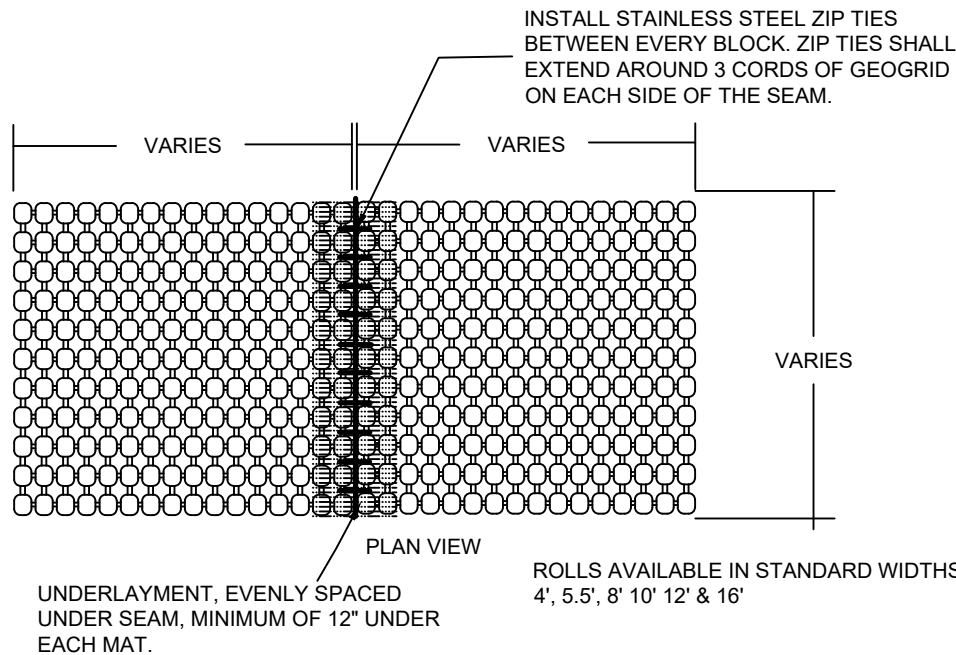

ROLLS AVAILABLE IN STANDARD WIDTHS: 4', 5.5', 8' 10' 12' & 16'

SITE SOIL TYPE	SUBGRADE THICKNESS OF CRUSHED STONE	
	LIGHT LOAD VEHICLES CARS/PICKUP TRUCKS	MEDIUM LOAD VEHICLES LARGE TRUCKS, RV'S, DELIVERY VEHICLES
GRAVEL & SAND COARSE WELL DRAINED SOILS	BASE: 3.5 - 7.5 INCHES OF CRUSHED STONE	BASE: 7.5 INCHES OF CRUSHED STONE
SILTY SOILS FINE GRAIN SOILS, POOR DRAINAGE	BASE: 7.5 INCHES OF CRUSHED STONE	BASE: 9.5 INCHES OF CRUSHED STONE
CLAY SOILS FINE TO VERY FINE	BASE: 6 - 9.5 INCHES OF CRUSHED STONE	BASE: 10 INCHES OF CRUSHED STONE

### FLEXAMAT INFORMATION

Manufacturer: Motz Enterprises, Inc.  
 Product Name: Flexamat®  
 Address: 3153 Madison Road  
 Cincinnati, Ohio 45209  
 Telephone: 513-772-MOTZ (6689)  
 Email: Info@Flexamat.com  
 Website: [www.Flexamat.com](http://www.Flexamat.com)

### FLEXAMAT® DRIVABLE SURFACE INSTALLATION DETAIL